

# T5HO Tube Guards


The new T5 HO Tube Guard features an increased size and venting endcaps. The increased size allows a greater distance of the guard from the hottest point of the lamp near the end of the lamp. This distance reduces the temperature of the guard material measured at the inside wall of the guard.

The T5 HO Tube Guard is suitable for use with T5 HO lamps in normal operating conditions where the surface of the lamp does not exceed 200°F.



### SAFETY TUBE GUARDS FOR T5HO LAMPS

<b>POLYCARBONATE</b>	4'	PCS/CTN
CLEAR WITH ENDCAPS	ST5HO-4	48

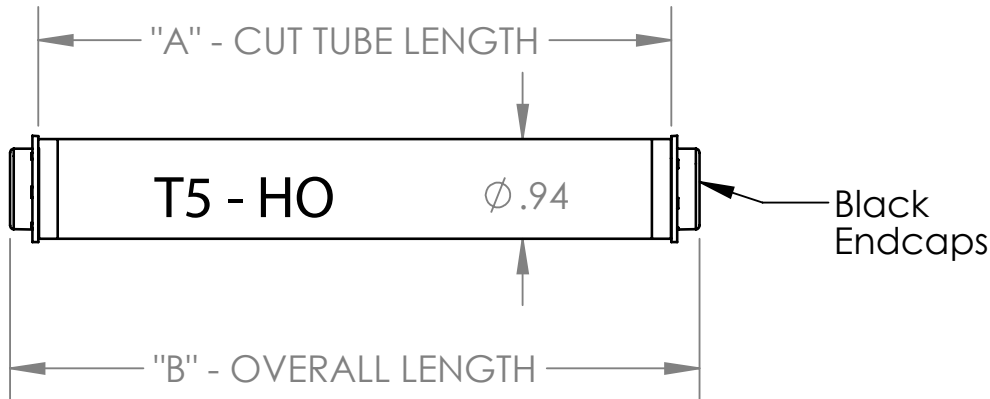

T5 HO Tube Guards	
Nominal Length	4'
Color	Clear
DIM "A"	44.68"
DIM "B"	45.27"

**T5 HO TUBEGUARDS USE ONLY WHEN IN CONJUNCTION WITH ELECTRONIC HIGH EFFICIENCY BALLASTS THAT ARE DESIGNED TO PREVENT OVERHEATING OF THE LAMP DURING USE AND AT "END OF LIFE"**

**It is not recommended using under any condition where surface lamp temperature can exceed 200 degrees F or in an enclosed fixture where normal venting is prohibited. Not recommended for use with dimming systems or applications where power surges or spikes can cause arcing or over-burning of lamps.**

**NO WARRANTY**

Product offering and specifications subject to change without notice.

