

**CITADEL VALUE SERIES:**

A new addition to the Citadel Family. The Value Series a has the look and feel of the traditional Citadel Narrow 4', but with a cost advantage of being a polycarbonate housing, simplified latching clips and economical mounting brackets.

**FEATURES & BENEFITS:**

**Housing**

- 5VA (f1) Polycarbonate Gasketed Housing
- UL approved for through wiring
- UL f1 rated (suitable for outdoor use exposure to ultraviolet light)
- Meets UL 746 (suitable for exposure and immersion of water)

**Boardtrays**

- LED boards are attached to a one piece white steel tray
- Tray securely snaps into stainless steel retainer clips, which are installed in housing
- Integral hanger hook allows suspension of the tray during maintenance & installation
- Nylon safety straps attach the tray and retainer clips for safety and easy maintenance
- Drivers mounted directly to the backside of the housing

**Gasket**

- "Poured in place", closed cell polyurethane
- Compression recovery of 95-99%
- Will not support fungal growth

**Clips and Latches**

- Quick easy 1 Piece snap on installation
- 3-Piece Latch Options available
- CAPTIVE Latches, affixed to the housing therefore will not fall off
- Both Available in
  - White POM
  - Marine Grade 316-Stainless Steel



**CERTIFICATIONS:**



IP65

IP66

IP67



RoHS



Learn about SLP Certifications at:  
[www.splighting.com/SLP/certificatedefinitions.html](http://www.splighting.com/SLP/certificatedefinitions.html)

**DIMENSIONS:**

All dimensions are shown in inches unless otherwise noted.

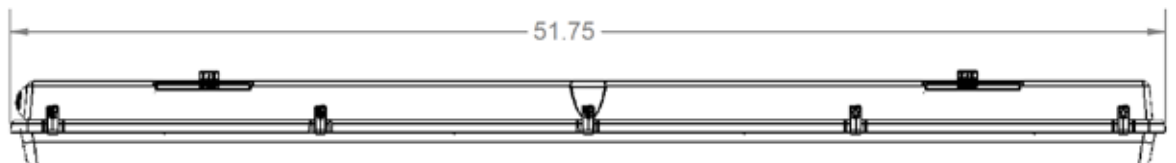

# CITADEL VALUE SERIES - NARROW 4'

## ACCESSORIES & OPTIONS:

### Optics

- All SLP lenses are injection molded and have the Guardian Seal feature
- Available in either Clear or FR50 Frost
  - Acrylic
    - 100% impact modified (similar to DR), non-yellowing
    - Best in areas with UV exposure
    - Clear transmission 93%
    - Frosted transmission 88%
  - Polycarbonate
    - UV stabilized
    - Best in extreme temperature and high abuse conditions (freezers/ foundries)
    - Clear transmission 89%
    - Frost transmission 75%

### Two styles of lenses

- Smooth (low profile)
  - Best shallow lens for LED boards and overall light distribution
- Lineal Ribbed (low profile)
  - Best for obscuring the image of fluorescent or LED lamps



Photometrics Available at: [http://www.slplighting.com/SLP/photometrics\\_enter.html](http://www.slplighting.com/SLP/photometrics_enter.html)

### Installation:

- Fixture can be mounted in various ways direct to the ceiling, pendant (single or dual point) or by Grippler® cable or chain using the Bail Option.



Bail

## APPLICATIONS:



STAIRWELLS



STORAGE ROOMS



UNDER AWNINGS



OPEN BAYS



GARDEN CENTERS